



Windshield-Mounted Vehicle Safety Technologies Placement

Department of Transportation Federal Motor Carrier Safety Administration

4910-EX-P, 49 CFR Part 393, Docket No. FMCSA-2016-0234, RIN 2126-AB94.
(A Brief Summary) Page no. 25

(e) Prohibition on obstructions to the driver's field of view – (1) Devices mounted on the interior of the windshield


(i) Antennas, and similar devices must not be mounted more than 152 mm (6 inches) below the upper edge of the windshield. These devices must be located outside the area swept by the windshield wipers, and outside the driver's sight lines to the road and highway signs and signals.

(ii) Paragraph (e)(1)(i) of this section does not apply to vehicle safety technologies, as defined in § 393.5, that are mounted on the interior of a windshield. Devices with vehicle safety technologies must be mounted:

(A) Not more than 100 mm (4 inches) below the upper edge of the area swept by the windshield wipers;

(B) Not more than 175 mm (7 inches) above the lower edge of the area swept by the windshield wipers; and

(C) Outside the driver's sight lines to the road and highway signs and signals.

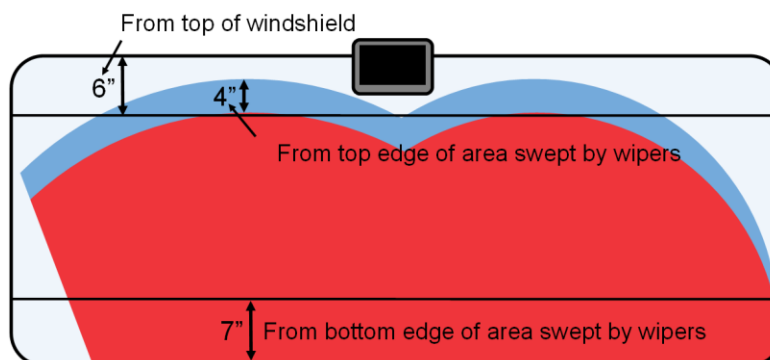

574-807-6002 www.verityrvs.com Serving OEMs & Fleets

56600 Twin Branch Dr., Mishawaka, IN 46545

A division of Component Solution Services, LLC.

Woman-Owned

Est. 2002

Subject to change without notice