



We do not cut corners,
we cut your risks.

7-INCH "S" SERIES SYSTEM Part # SM07S



Est. 2002 with over 20+ years of the
Latest Engineering, Highest Quality, Best Support
COST-EFFICIENT

Please read this manual completely before operating.

A division of
Component Solution Services, LLC.
56600 Twin Branch Dr.,
Mishawaka, IN 46545
www.VeritySafe.com

TABLE of CONTENTS

Contents


ABOUT US	3
THINK SAFETY	4
SYSTEM FEATURES.....	6
SYSTEM COMPONENTS	7
MOUNTING	8
CABLE CONNECTIONS	9
MONITOR OPERATIONS	10
MENU OPERATIONS	11
SYSTEM DIMENSIONS	14
VERITY® WARRANTY	15
TECHNICAL SUPPORT	16

SALES
574-807-6002

TECH SUPPORT
574-807-6004

www.VeritySafe.com

Our tech support is manned by real people in front of all our powered-up systems prepared to knowledgeably talk you through an issue solution – not a person with no knowledge in front of a spreadsheet of prepared phrases. Verity=24/7 support for OEMs and Fleets. This manual does not reflect changes in components to customized systems.

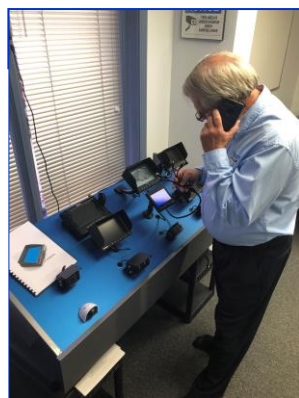

ABOUT US

Component Solution Services, LLC offers the Verity® systems to meet any requirements and price point within the trucking, specialty vehicles, and RV industry. Verity is also home to the Reveal® line of specialty format systems. Our standard cabled systems offer unparalleled features into the trucking and RV industries. Designed for professional drivers, **Verity** develops and markets products and applications to transmit video, audio, and data either individually or in all combinations. The company has also developed, manufactured, and marketed different types of personal and vehicle video cameras, DVRs, and accessories for the commercial transportation, fire/rescue, and marine OEM markets.



Use this barcode or
link to visit our
website
www.VeritySafe.com



THINK SAFETY

Read our manual before operating
or installing this system.

Most likely, your system came pre-installed so the installation section would be for reference.

Thank you for your purchase of our Verity SM07S. When installed and used properly, your SM07S is designed to deliver you years of trouble-free operation. This manual contains important information required to properly install and operate the unit. Verity units are designed for quick installation by trained professionals in proper installation environments. Our designs are based on decades of working with vehicle manufacturers.

Verity products are intended to be installed as a supplement and our observation systems and/or products are not intended for use as substitutes for rear-view mirror devices, or for any other standard motor vehicle equipment which may be required to be installed on vehicles by law. Verity products promote improving the vehicle operator's field of view. Our products are no substitute for proper defensive driving techniques, observance of traffic laws, and motor vehicle safety regulations.

Installation Location

It is unlawful in most locals for any person to drive a motor vehicle equipped with a television viewer/screen located at any point forward of the back of the driver's seat or in any location that is visible, directly, or indirectly to the driver while operating the vehicle. Our systems are designed to be used primarily as a rear observation device.

DO NOT OPEN ANY COMPONENT. There are no serviceable parts inside any of the components of the SM07S. Opening the product will break the tamper indicators and void the warranty. Contact our tech support if a problem should arise: 574-807-6002. For faster response, fill out a service ticket found on our website. www.veritysafe.com

WARNING

- ◆ Do not place heavy objects on cables or cover them with carpet or mats.
- ◆ Do not place cables where they can be crushed in any manner.
- ◆ Our systems are designed as a driving aid. Watching videos, broadcasts, DVDs and/or any images other than intended driving assistance cameras is prohibited.

CAUTION

- ◆ To avoid damage to the electronic circuit, stop using this product while doing welding work to the vehicle and/or trailers.
- ◆ Never immerse any component in water, and do not employ spray cleaners. When cleaning, use a damp lint-free cloth only.
- ◆ Connect this unit only to other compatible devices.
- ◆ Although our products have built-in surge and cross polarity protection, make sure all cables are connected properly; improper cable connections may damage the camera and the monitor.
- ◆ Cables should not be allowed to touch hot or rotating parts, such as the engine, ventilator, etc.
- ◆ Do not locate the monitor near heat generating vents or devices.
- ◆ Turn off power to the monitor when connecting the camera.

Monitors are not designed to be waterproof. (Our SM07F waterproof monitor is the exception). Exposure to water, such as rain, may damage the unit.

SYSTEM FEATURES

MONITOR SPECIFICATIONS

(Monitor part #MK07S)

Screen size: 7-inch digital screen (16:9)

High Resolution: 800 x 480 Pixel (RGB)

System: PAL/NTSC selectable

Contrast: 400:1

Brightness: 300 cd/m²

Power supply: DC 12V~24V with reverse polarity protection

Operation temperature: -20°~70°C

Storage temperature: -30°~80°C

Monitor view angle: Horz. L (70) R (70) Vert. UP (50) DOWN (70)

3 camera inputs with shrink tube labeled trigger wires,

Auto blue screen if no signal on the activated channel.

Size: 7" (W) x 4 ¾" (H) x 2 ¾" (D) Weight: 14.7 oz

Features: Removable HD sunshade, LCD screen, LED blue light buttons, high-quality processor, in-line waterproof fuse, easy to use OSD menu function via buttons: reversing image delay time 0~10s, Mirror/Normal image, plus horizontal flip, multi-language, high output speaker.

CAMERA SPECIFICATIONS

(Camera Part #C001S)

Horizontal Resolution: 600 TV Lines

TV System: NTSC

Image Type: 1/3 Inch Color CCD SONY (or equivalent)

(no cheap off brands used)

Effective Pixel: 976 (H) x 499 (V)

Illumination: 0 Lux (built-in 17 high output IR LEDs for night vision)

Aluminum Housing

Waterproof: IP68

Power Supply: DC 12V (power from the monitor)

Shockproof: 4G

Operating Temperature: -20°~70°C

Built-in Microphone

Viewing Angle: 140°

SYSTEM COMPONENTS



7-Inch digital
LCD monitor



Manual



Weatherproof Camera
with night vision



20-Meter Camera
Cable



13-pin to 4-pin Monitor
Harness



"Fan" Style Mount

MOUNTING



This monitor can be mounted on the dash and on horizontal and vertical surfaces. Make sure the view is suitable for the driver to observe the images. Take care not to block any necessary viewing area when mounting. Before mounting the system, permanently hook up all connections to ensure proper operation.

Mounting Monitor

- After determining the monitor location, position the monitor support bracket, mark the bolt hole location, and drill the holes. Be careful not to drill into any other surface where wires and components may be hidden.
- Attach monitor Fan Bracket
- Connect one end of the power cable (wire) to the proper connections. Connect the other end of the power cable (plug) to the monitor; connect the monitor and the camera with the 13-pin system connecting the cable. (see page 9)


Camera Connection

Do NOT make the cable tight from the back of camera going into the truck

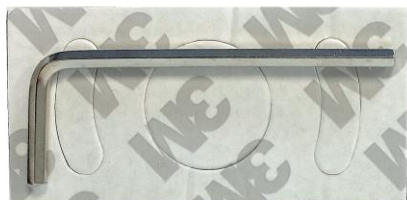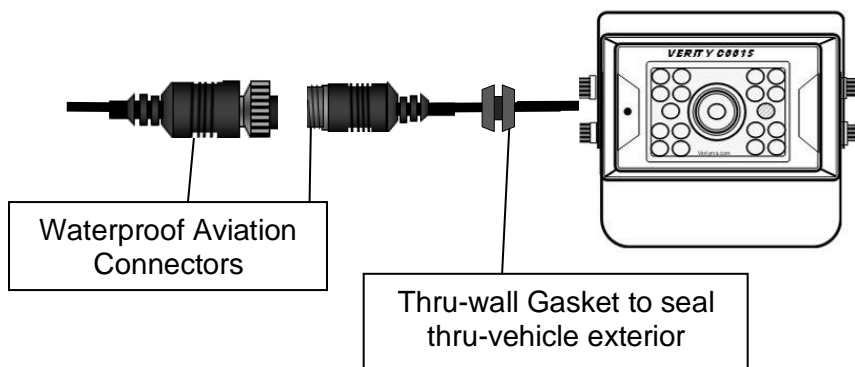

Be sure to use the vibration gasket when installing the camera. It is packaged with the camera hex wrench.

CABLE CONNECTIONS


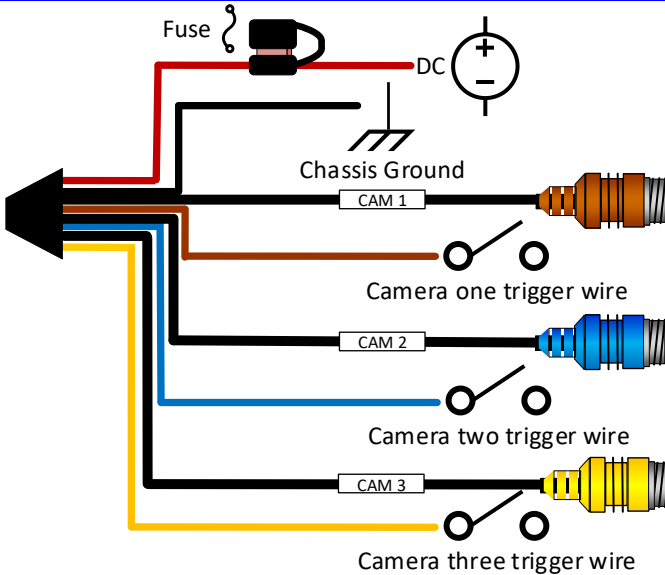


Wire Connection Key:

- ◆ **RED** wire to ignition hot (+) 10-26 volts
- ◆ **BLACK** wire to ground (-) (please use a chassis ground post)
- ◆ **BROWN trigger wire is for camera 1.** Connects brown trigger wire to backup light wire or backup beeper wire. This connection is needed to activate the monitor when putting the vehicle into reverse.
- ◆ **BLUE** (CAM 2) trigger wire for accessory cameras (side cameras etc.) **DO NOT** power this wire unless you intend to trigger a second camera. It will be connected to your trigger power source, such as a turn signal light wire.
- ◆ **YELLOW** (CAM3) trigger wire for accessory cameras (side cameras etc.) **DO NOT** power this wire unless you intend to trigger a third camera



MONITOR OPERATIONS

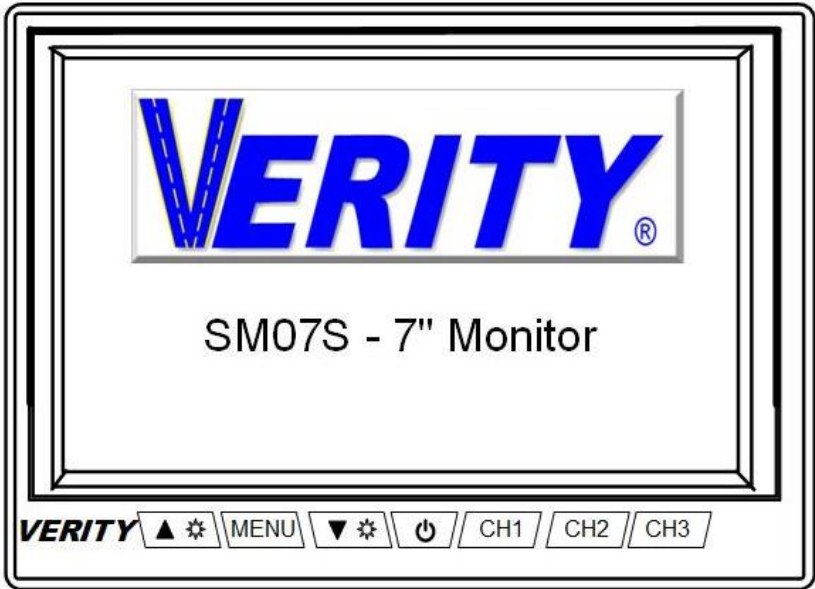

Buttons from left to right

1. (VOL+) Volume Increase Up Arrow
2. Menu Control Button
3. (VOL-) Volume Decrease Down Arrow
4. Power Off/On button - Red color is stand-by- Blue is powered
5. Channel / Camera 1
6. Channel / Camera 2
7. Channel / Camera 3

Monitor will turn on automatically if trigger wire is activated.

MENU OPERATIONS

The menu button operates the menu options:

A rectangular button with a thin border and the word "MENU" centered inside in a bold, sans-serif font.

The following shows how the menu options work.
The down and up arrow buttons control decreases
and increases the options.



Menu Press 1 time

PICTURE: Brightness, displays on-screen.

BRIGHTNESS **20**

Menu Press 2 times

CONTRAST: Contrast, displays on screen.

CONTRAST **20**

Menu Press 3 times

COLOUR (Color): displays on the screen.

COLOR **20**

Menu Press 4 times

tone: displays on the screen.

tone **20**

Menu Press 5 times

VOLUME: displays on the screen.

VOLUME **20**

Menu Press 6 times

ZOOM Toggles between 16:9 / 4:3 image sizes

Menu Press 7 times

“FLIP” Image Orientation:

This selection flips each camera image individually both horizontally and vertically. This allows for a correct image of interior/forward-facing cameras.



Menu Press 8 times

LANG (LANGUAGE): “Show English as the primary language.”
Displays on the screen.

LANG

ENGLISH

Menu Press 9 times

Delay time monitor stays on after the trigger wire is deactivated. It can be set to 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10-second delays.

Delay 0 (camera 1) Delay 3 (camera 2 & 3)

SIDE CAMERA HOOK UP – when adding a side camera, set that camera delay to 3 seconds.

Menu Press 10 times

Auto-dimming function
Displays on the screen.

DIMMER

ON

Menu Press 11 times

Parking line functions

Displays on the screen.

PARK OFF

When the parking line function is on the backup lines can be adjusted. (See section below)


Menu Press 12 times - Resets the monitor back to factory defaults

Displays on the screen.


RESET

Adjusting Parking Lines


Step One: keep the engine off and turn ignition to accessory mode.

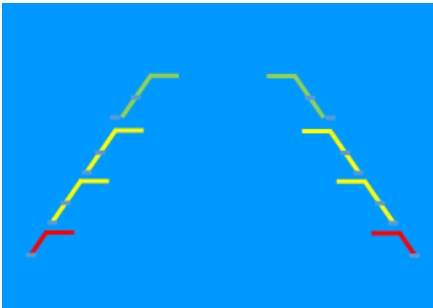


Default Screen

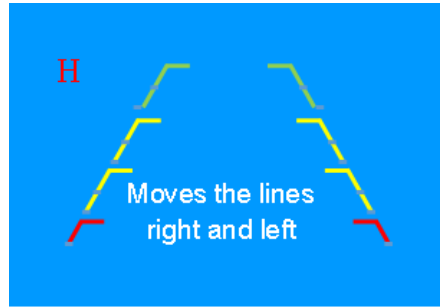

Horizontal Adjustment


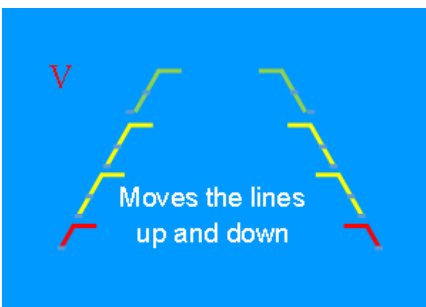


Vertical Adjustment

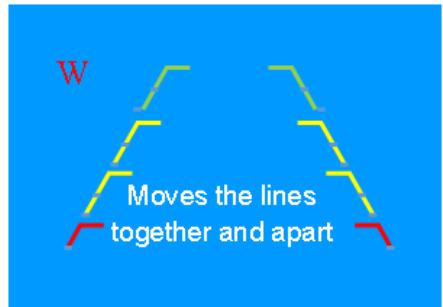

Width Between Lines

SYSTEM DIMENSIONS

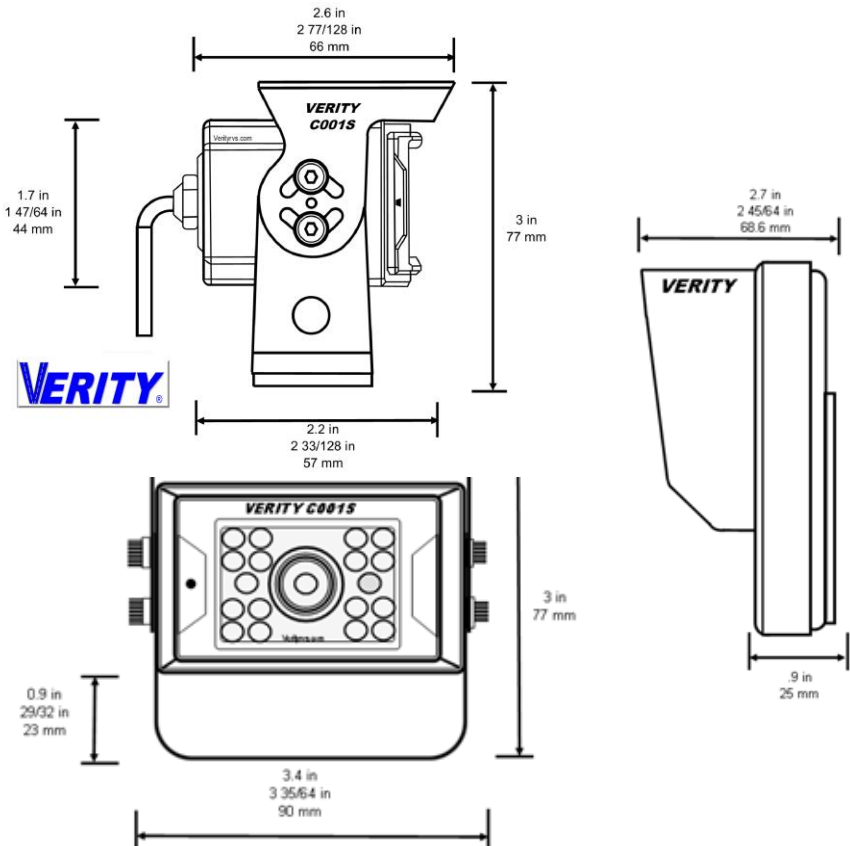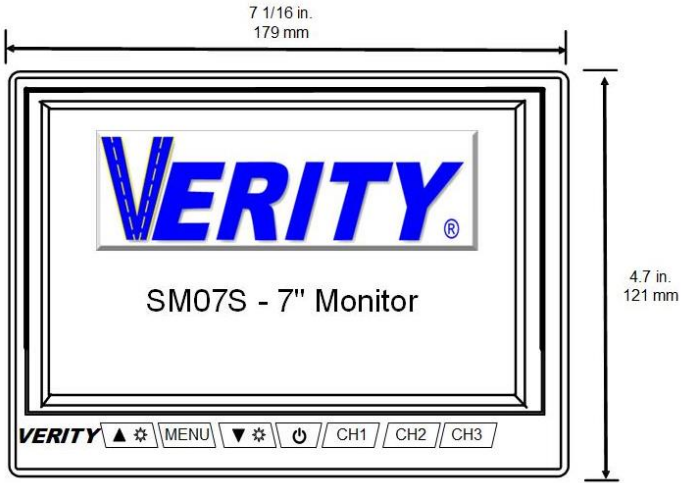

VERITY® WARRANTY

A division of
COMPONENT SOLUTION SERVICES (CSS)
LIMITED ONE (1) YEAR WARRANTY

1. Verity® products' warranties are not transferable. The warranties apply to the retail consumer for one (1) year and covers against defects in material and quality. Cables are not warranted.

2. Defective components will be replaced or repaired, based on a Verity evaluation of the component. In-bound shipping charges, based on the Verity rate allocated in the RMA (returned merchandise agreement), will be covered once the component has been deemed defective at the CSS warranty facility. The pre-assigned in-bound freight will be supplied upon the return of the product. All repaired/replaced warranty parts shall be for the remaining duration of the original warranty time period.

3. Verity takes pride in our products and will aid in the processing of your components:
 - a) All warranty claimants must have consulted our technical support department for troubleshooting and the acquiring of an RMA. Contact can be made via email at techsupport@veritysafe.com or call 574-807-6002.
 - b) When the warranty claim is made, the consumer must establish the warranty start dates by presenting documentation regarding the date of retail purchase (e.g., bill of sale).
 - c) Service performed by non-authorized service personnel may void all warranty claims.
 - d) Verity will make no payments for system removal or system re-installing, mileage allowance, or transportation expenses.The limited warranty does not cover damage resulting from misuse, accident, modification, or alteration to hardware or software, tampering, unsuitable physical or operating environment beyond product specifications, improper maintenance, or failure caused by a product for which Verity is not responsible. There is no warranty for any product with removed or altered identification labels. **Verity DOES NOT PROVIDE ANY OTHER WARRANTIES OF ANY KIND, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OR CONDITIONS OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. SOME JURISDICTIONS DO NOT ALLOW THE LIMITATION OF IMPLIED WARRANTIES, SO THIS LIMITATION MAY NOT APPLY TO YOU.**

4. This warranty gives you specific legal rights, and you may also have other rights that vary from state to state.

TECHNICAL SUPPORT

A service ticket can be found online and completed to supply the quickest service. The service ticket can be easily found on our website www.VeritySafe.com or use the 3-D code to the right. Please have the serial number of the system, which is found on the back of the monitor when contacting the service department. We take great pride in delivering the most dependable product in the industry. Each item was 100% QC tested, and then we randomly recheck up to 10% before it leaves our hands to you. We have a 0.021% issue rate for all Verity cameras and monitors over the past eight years.



Email Tech Support: tech@veritysafe.com

Phone Tech Support: 574-807-6004

Note: After office hours calls will be answered or called back as quickly as possible by one of our Tech Team. Please note: Technicians cannot provide pricing or availability.



a division of

Component Solution Services

56600 Twin Branch Dr.,

Mishawaka, IN 46545

574-807-6002

Toll-Free 844-875-4799

We at Verity would like to personally thank you for purchasing our product. We strive to supply the best products at a competitive price. We care that you enjoy a safe driving experience.